


# FOUR FREQUENCY AUDIO TEST TONE SELECTION

Selectable Audio Frequencies on a Technician's Workbench for Equipment Testing and Calibration

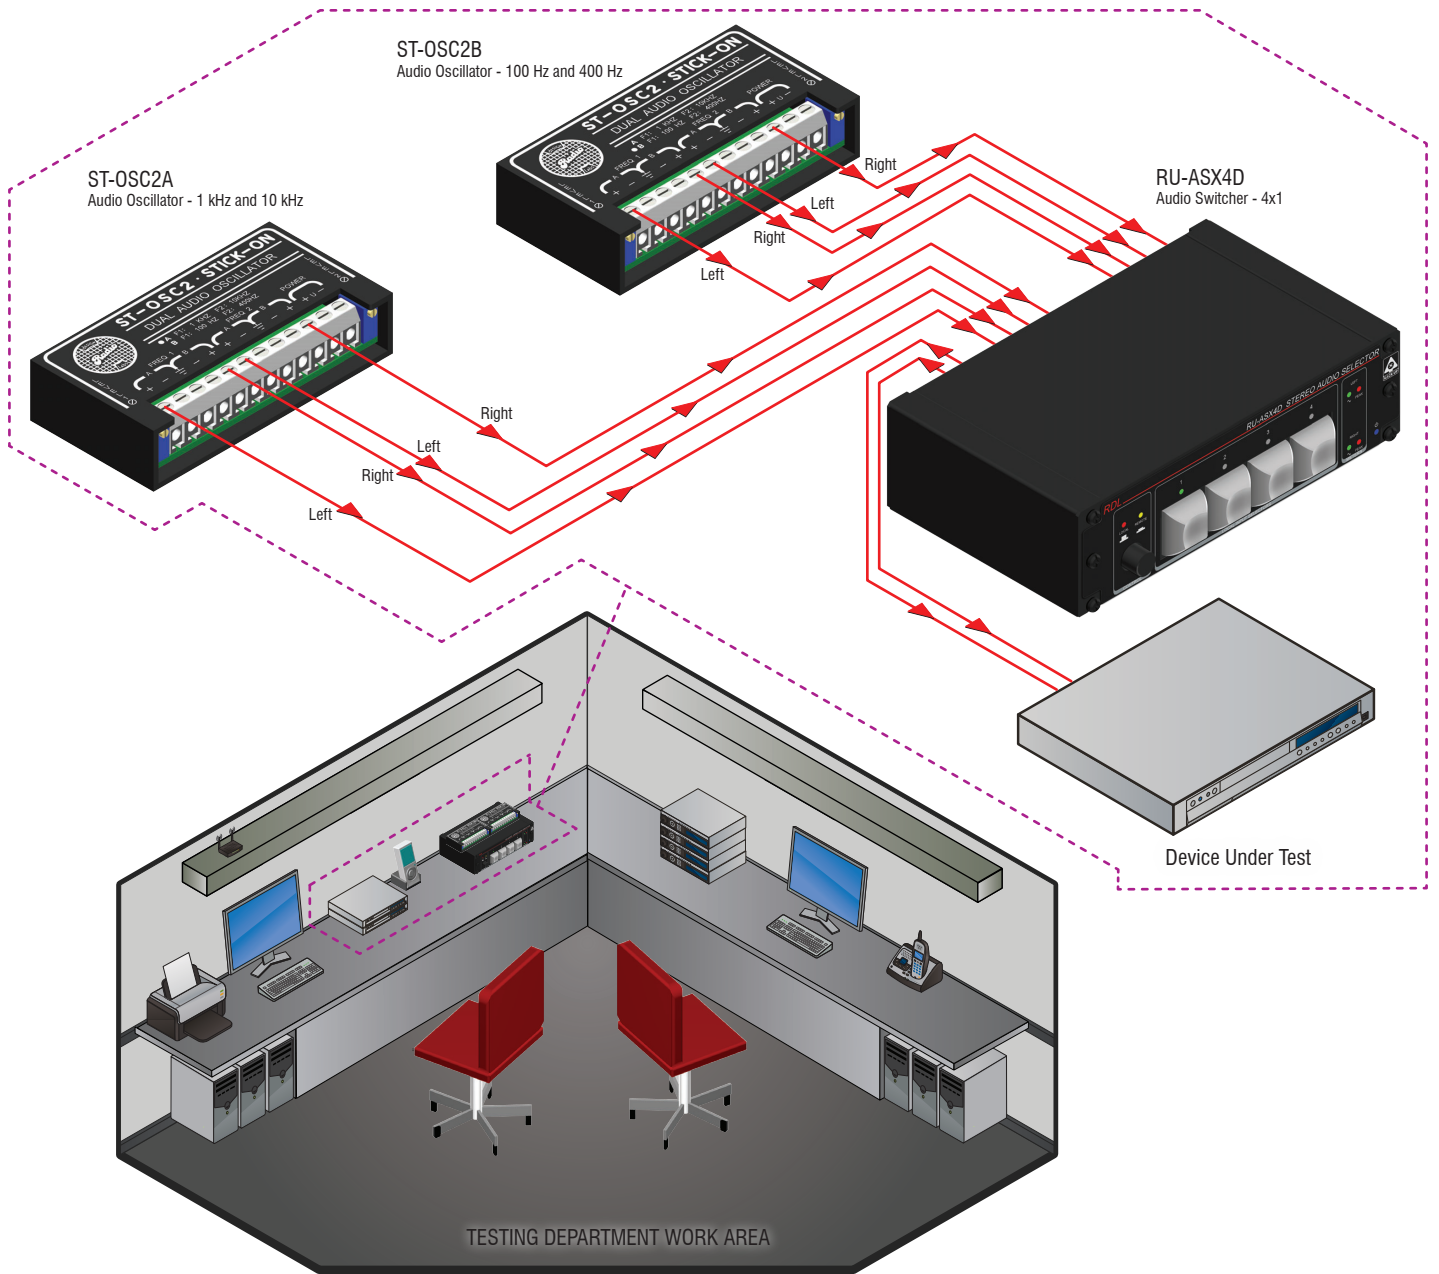

## Description:

The ST-OSC2A and ST-OSC2B Dual Audio Oscillators are installed on this audio practitioner's workbench to produce stable sine waves at four distinct frequencies. The RU-ASX4D stereo 4X1 Audio Switcher provides the technician with a convenient means of selecting any of the 4 available tones which are used for level calibration and frequency response checks.

The combination of the ST-OSCA and ST-OSCB provides tones at 100 Hz, 400 Hz, 1 kHz and 10 kHz. The level of each tone is adjustable between OFF and +14 dBu and is accurately maintained by integral AGC circuits. The output may be connected to balanced or unbalanced loads.

### Parts List

Product	QTY
ST-OSC2A	1
ST-OSC2B	1
RU-ASX4D	1

### Recommended Pwr. Supplies

Product	QTY
PS-24AS 24 Vdc 500 mA	1

### Line Color Key

- Line Level Audio Signal
- Loudspeaker Level
- Control Signal
- Video
- Mic Level Audio Signal
- Ground
- Power
- Miscellaneous